

## NETWORKING CORRIDORS FOR PACKET DATA AND VOICE COMMUNICATIONS

### TECHNICAL FIELD

5 This invention relates to a method and installation for providing Wide Area Network (WAN) connectivity for geographically dispersed sites. In particular it relates to the provision of WAN connectivity in the context of geography such as may typically apply in countries of widely separated major cities and regional population centres. The invention has particular application to Australia and will be generally described with reference to this country but it is not intended that in its broader concept that it  
10 should be so limited to a single country.

### BACKGROUND ART

Conventionally, WAN connectivity is provided by providing a series of capital city based WAN hubs using inter-capital transmission infrastructure for inter-hub connectivity, with variable length, but on average long, point-to-point dedicated  
15 services to provide site-to-hub connectivity, where signals from one of the capital city hubs is transmitted directly and indeed only to the other end of that particular backbone connection which terminates on a hub of another capital city.

Further, such a backbone which is intended to carry high bandwidth information is set up as a dedicated circuit based channel system.

20 By this we mean that any communication requires a channel to be allocated for the transmission of a particular transmission purpose and each of a number of channels will be variously allocated to then be dedicated to transmit whatever information be this voice or data is provided.

25 Such a backbone connection can provide very fast communication speeds from main city hub to main city hub and then geographically distant places are then connected by dedicated circuit based channels directly connecting the remote place to the closest hub.

There may be secondary hubs emanating from a main city hub but the system in existence at the present time in Australia is therefore a system based upon  
30 dedicated circuit based channels which will carry signals very quickly indeed along

## 2

the backbone that may or may not transmit such signals at such a high rate to secondary hubs or even tertiary hubs or hub to point connections.

The difficulty with such an arrangement is that costs chargeable with respect to transmission of a signal necessarily relate to the capital cost of the equipment

- 5 Installed in order to transmit the signals and this can be directly dependent then upon the distance and also the switching hubs that a signal might have to go to in order to go from one point geographically in Australia to another point geographically spaced apart in Australia.

- 10 Because of the current way that network in existence in Australia operates, secondary or tertiary networking elements are directly connected to a nearest capital city hub.

- 15 For a country town then, in Victoria for instance, to communicate with a country town in New South Wales, the signal from the Victorian country town is firstly directed to a first transit transmission hub which we are terming a tertiary hub, then through a secondary hub and then to a capital city hub in Melbourne which is then conveyed through a dedicated circuit based channel on the backbone to Sydney from whence again it will be then directed out by way of switching allocated channels to a secondary and tertiary hub and eventually to the location of the geographically remote region such as a small country town.

- 20 However, the two country towns can be simply on opposite sides of a border between Victoria and New South Wales which may be only several kilometres apart.

- 25 Nonetheless, the cost of communication passed on to the customer has to take into account the amount of equipment necessary in order to transmit that signal and has to therefore be very high indeed even though the physical distance apart of the two townships can be very small.

This description is intended to describe in a general sense a current system that is currently operating in Australia and which has the effect of establishing significant costs of using the communication network.

- 30 A first problem therefore exists that when using dedicated circuit based channel transmission techniques that it is also an economic challenge to put such equipment

## 3

that is necessary to effect such switching of channels and effecting transmission at high speed along those channels at anywhere but main city hubs. This is a very expensive process in itself and also if a backbone connection was to be between geographically closer hubs then there is necessarily a very high equipment  
5 installation cost, significant potential difficulties with increased capital cost on a very high speed backbone with potential increase in challenge to any reliability.

Generally then it does seem that the use of a high speed dedicated circuit based channel backbone between only capital cities (or at least major population centres which can justify infrastructure costs) is the current solution considering the capital  
10 cost economics as applied to this type of technology.

It does have a problem that if for any reason the backbone connection should fail, then literally all communication based upon this system between two states in Australia would also cease. The problem we have seen therefore, in this currently existing system is that it implicitly causes very high costs of communication to many  
15 outlying country towns. I have re-evaluated the current situation particularly in Australia although the problem will be similar elsewhere.

#### DISCLOSURE OF THE INVENTION

I have discovered that by using an alternative networking technique for a backbone this can allow for dramatically reduced costs described. By allowing intermediate  
20 connections to be made without incurring the very high infrastructure costs achieves this and further the technique for transmission facilitates an installation with much improved potential reliability.

Further, I have realised that this can be provided in a way that has less vulnerability to being cut off than is the case with the current system.

25 It is an object of this invention to provide at least some improvement over the current system or at least provide the public with a useful alternative.

My proposal, in a general sense, is to provide a backbone networking route based upon transmission using addressed digital logic packets and to provide a speed of transmission that will facilitate both voice as well as data signals being  
30 transmitted and that this can then also allow for voice quality and continuity being of an acceptable standard for public telecommunication purposes.

## 4

A first advantage of this is that even an extremely high speed backbone route can be intersected very economically providing a further intermediary hub or can be connected to a spur.

- Further, such an arrangement facilitates again with addressed digital packet transmission switching most hubs being able to route signals through at least two alternate paths so that in the event that one of these paths is destroyed, the other remains viable. This "protection" is traditionally provided by significant, sometimes complete, duplication of infrastructure. In the arrangement of the invention, such protection is inherent without the need for additional infrastructure.
- 5
- 10 With this arrangement then, it becomes very economic to provide widely scattered locations through the country with both high speed data connection and voice communication at a very good, if not excellent quality, which will no longer require that the signals pass through a plurality of switching stations with the attendant long routes and expensive equipment necessary for this.
- 15 A typical speed of communication that will provide the quality of voice communication and at the same time, excellent data transmission for signals other than voice or equivalent signals, is 2.5 gigabits per second.

- This is indicative of speeds that can currently be achieved with light fibres and in real terms, significantly higher speeds can be now achieved if useful with the amount of communication.
- 20

- From an economic point of view in Australia, I have established that a communication through a backbone using at least 2.5 gigabits per second transmission rate of addressed digital packet logic would enable an enormous number of places geographically spread throughout a region such as Australia to be connected at relatively low cost to a very high speed connection which can be used both for conventional voice communication or it can also be used for internet or other digital transmission systems.
- 25

- In the case specifically of Australia, I have established that there are currently light fibre connections available between at least two capital cities, which are currently only being used for data transmission.
- 30

Further, this is being used in the conventional mode, that is that it is being used for

## 5

end to end traffic only for digital data.

I have established that an installation can be used in a dramatically improved way providing very much needed communication at much higher speeds and at very high economies to most of the outer lying locations in Australia at costs which will be  
5 able to be accessed at very competitive economic rates indeed.

I can distinguish this concept by establishing that it is a very high speed addressed digital packet logic incorporating and providing with that logic transmission both for general data and voice equivalent transmissions (voice equivalent transmissions means those signals that will normally be transmitted for use as analogue signals  
10 eventually) and where, in connection with such a high speed communication which at the least provides for communication from end to end at this speed, will also have at least one intermediary take off providing either a spur connection to an intermediary hub or a hub as part of the connection.

Currently, such high speed connections are effected through light transmitting fibres  
15 and we therefore can further characterise the invention by being directed to at least one light transmitting fibre effective for carrying the signals and indeed carrying the signals and having some intermediary take off.

It is relevant that the invention is directed to a backbone communication system which will enable these significant improvements to be achieved in a general  
20 telecommunication system.

It currently, in most cases, is uneconomic to provide direct connections to an end user other than through installed equipment such as that which is currently provided by a telecommunication operator such as Telstra in Australia.

Given that we are talking about signals which are addressed digital packets, it is  
25 viable, both from a technical and economic point of view, to route these through a local telecommunication network for perhaps distribution to each end user at a local level.

Such communication would normally be by way of dedicated circuit based channel communication although it is not especially relevant to this invention as to what the  
30 end user connection might be.

## 6

For instance, for a larger user, there could be a direct connection and for smaller users, a connection via a router into the distributed mesh system in accordance with this invention.

- 5 Such an interconnection might therefore be with an appropriate gateway controlled interconnection at a local exchange, or at a customer premises aggregation point, which could be called a neighbourhood hub.

It can be said then that the invention could be said to reside in a data and voice digital communication network installation providing a backbone communication bandwidth solely through addressed digital logic packets of at least 2.5  
10 gigabytes/second between geographically substantially dispersed locations being primary hubs, and having at least one light transmitting fibre through which the transmission is effected with means at respective ends, being the primary hubs, of the fibre to effect an input and output of the communication signals at a rate which is at least the said bandwidth, and further having at least one intermediate means  
15 being a secondary hub which is substantially geographically dispersed from said locations of the primary hubs to effect an input and output through addressed digital logic packets into the fibre, and means to then effect transmission of and signals from said secondary hub to a further geographically dispersed location at a rate which is less than the said bandwidth between said primary hubs.

- 20 In a further form the invention may be said to reside in a data and voice digital communication network installation including a plurality of packet communication networking hubs, logically configured in a hierarchy of at least two tiers, a transmission backbone network linking said hubs, including at least one light transmitting fibre with means to extract signals from and apply signals to the fibre  
25 which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not located at a primary hub, wherein the logical configuration of a given hub is substantially independent of its physical connectivity to the transmission backbone  
30 network.

In preference, a logical connectivity scheme is constructed and is operated so that it provides a first logical connectivity mesh linking each of a plurality of hubs comprising a first hierarchical tier of hubs, at least one second connectivity mesh linking each of a plurality of hubs comprising a second hierarchical tier of hubs to at

least two hubs of said first tier.

In preference, said logical connectivity scheme further includes point to point connectivity between each of a plurality of hubs comprising a third hierarchical tier of hubs and at least one hub from a higher hierarchical tier and point to point  
5 connectivity between any hub and selected locations external to the communication network scheme.

In a yet further form, the invention may be said to reside in a method of operating a data and voice digital communication network including a plurality of packet communication networking hubs, logically configured in a hierarchy of at least two  
10 tiers, a transmission backbone network linking said hubs, including at least one light transmitting fibre, extracting signals from and applying signals to the fibre which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not located at a  
15 primary hub, wherein the logical configuration of a given hub is substantially independent of its physical connectivity to the transmission backbone network.

In preference there is undertaken the construction and operation of a logical connectivity scheme including a first logical connectivity mesh linking each of a plurality of hubs comprising a first hierarchical tier of hubs, at least one second  
20 connectivity mesh linking each of a plurality of hubs comprising a second hierarchical tier of hubs to at least two hubs of said first tier.

Preferably, there is point to point connectivity between each of a plurality of hubs comprising a third hierarchical tier of hubs and at least one hub from a higher hierarchical tier and point to point connectivity between any hub and selected  
25 locations external to the communication network scheme.

In a preferred arrangement there is a data and voice digital communication network installed in Australia providing for at least one communication network between Sydney and Melbourne which provides for a bandwidth of at least approximately 2.5 gigabits per second and has at least one intermediate node where the  
30 communication method is solely directed toward addressed digital packet transmission where both the digital and voice communication over such a backbone connection is by way of such addressed digital logic packets.

- In a preferred arrangement there is a data and voice digital communication network installation covering the geography of Australia providing a backbone communication bandwidth solely through addressed digital logic packets of at least 2.5 gigabytes/second between geographically substantially dispersed locations being primary hubs, and having at least one light transmitting fibre through which the transmission is effected with means at respective ends, being the primary hubs, of the fibre to effect an input and output of the communication signals at a rate which is at least the said bandwidth, and further having at least one intermediate means being a secondary hub which is substantially geographically dispersed from said locations of the primary hubs to effect an input and output through addressed digital logic packets into the fibre, and means to then effect transmission of and signals from said secondary hub to a further geographically dispersed location at a rate which is less than the said bandwidth between said primary hubs.
- 15 In a preferred arrangement an economical communications carriage infrastructure includes packet communication networking hubs, configured as primary, secondary and tertiary hubs, geographically positioned to achieve economically optimum coverage and a transmission backbone network including at least one light transmitting fibre with means to extract signals from and apply signals to the fibre which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not located at a termination point of the fibre.
- 25 In a preferred arrangement, a logical connectivity scheme is constructed and is operated so that it provides a primary connectivity mesh linking primary hubs, at least one secondary connectivity mesh linking each secondary hub to at least two primary hubs, point to point connectivity between each tertiary hub and either one primary hub or one secondary hub or both and point to point connectivity between any hub and selected locations external to the communication network scheme.
- 30 The invention can be directed to both a method of operating a telecommunication network or an installation for providing a telecommunication network for both data and voice and voice equivalent transmission.

It would be expected that such a communication system would be directed at least along the backbone and directly interconnected mesh connections using solely



addressed digital logic packet technology.

- 5 Preferably, the invention applies specifically to installations in Australia and provides for at least one communication network between Sydney and Melbourne which provides for a bandwidth of at least approximately 2.5 gigabits per second and has at least one intermediate node where the communication method is solely directed toward addressed digital packet transmission where both the digital and voice communication over such a backbone connection is by way of such addressed digital logic packets.

### BRIEF DESCRIPTION OF THE DRAWINGS

- 10 For a better understanding of this invention, it will be described with the assistance of drawings wherein Figure 1 illustrates the current networking backbone system, and hub connectivity system;

Figure 2 illustrates how there can be provided now, very economically, a networking backbone corridors system;

- 15 Figure 3 illustrates how such a networking backbone corridors system can enable an economical but very high bandwidth hub connectivity system for Australia;

Figure 4 illustrates how the networking backbone corridors system can be used to incorporate more hubs and to create bandwidth aggregation points for connections to multiple customers;

- 20 Figure 5 illustrates an extended high bandwidth hub connectivity system;

Figure 6 illustrates how this method can be applied to the city of Melbourne;

Figure 7 illustrates a possible physical connectivity diagram according to the invention;

- 25 Figure 8 shows the corresponding logical connectivity diagram for the network of Figure 7.

## BEST MODE FOR CARRYING OUT THE INVENTION

Referring in detail to the drawings, Figure 1 the current networking backbone system based on high a bandwidth inter-capital transmission backbone comprised of dedicated circuit based channels, providing connectivity between some of  
5 Australia's capital city hubs, and transmission backbones linking out-lying hubs to the capital city hubs. In this networking backbone system, provision of sufficiently high transmission speeds for carriage of data and voice traffic to and from hubs outside the capital cities, is uneconomical and is therefore only attempted when high traffic volumes are to be carried. For example, high transmission speeds  
10 between Sydney and out-lying hubs such as Griffith, Armidale, and Dubbo would be uneconomical.

These constraints in transmission backbone speeds have resulted in the current hub connectivity system. In this hub connectivity system it can be seen that high bandwidth connectivity is possible for inter-capital hub connectivity, but for other  
15 hubs it is constrained by the distance-dependent pricing of the transmission backbones between these hubs and their respective capital city hubs.

In contrast to the current networking backbone system illustrated in Figure 1, and referring specifically to Figure 2, it will now be seen as between Brisbane and Sydney that there are two parallel connections termed Corridor 1 and Corridor 2  
20 and that in each of these, there are a number of intermediary hubs from which further direct connections can be made to more localised locations.

The same can be seen to be that position with connections between Sydney and Melbourne where there are now two routes, namely Corridor 3 and Corridor 4, which respectively go through a number of smaller hubs and towns, for instance  
25 Corridor 3 goes through Wollongong, and then to Canberra, Albury, Wangaratta and Corridor 4 goes from Sydney to Shepparton, Bendigo, Gisborne and then Melbourne.

A single Corridor 5, connects from Melbourne through Adelaide to Perth, and in this case, an intermediary connection between Melbourne and Adelaide can be in  
30 Geelong and Ballarat.

An intermediary connection between Adelaide and Perth can be at Kalgoorlie, but

## 11

of course, there can be a number of further intermediary hubs which will be of relatively small cost and provide those connections with very high quality and high speed voice and digital communication.

- 5 With a secondary connectivity mesh which may be at a somewhat lesser speed than would be available through light transmitting fibres, there can now be seen to be a number of interconnections that can be made which provide still very high quality communication even though the quantity of traffic might be less.

Figure 3 shows high bandwidth connectivity for both secondary and tertiary hubs that now becomes possible again at very significant cost savings.

- 10 Figure 4 illustrates how the networking backbone corridors system can be used to incorporate more hubs and to create bandwidth aggregation points for connections to multiple customers.

It is then possible to establish an extended high bandwidth hub connectivity system such as illustrated in Figure 5.

- 15 The same method of high bandwidth networking backbone corridors can further be applied to the geographic area of a capital city. Figure 6 illustrates how this method can be applied to the city of Melbourne, thereby further extending the national and regional networking backbone corridors system, to include a specific metro  
20 networking backbone corridors system that is appropriately integrated with the former.

- Figure 7 shows the physical connectivity in a network including four tiers, where a further set of hubs, called in this instance neighbourhood hubs, is included. A first hierarchical tier of hubs, P1 and P2, called primary hubs is connected physically by optical fibre, via a number of hubs of a second hierarchical tier called secondary  
25 hubs, S1-3. A third hierarchical tier of hubs, T1-6, called tertiary hubs is connected to each other or to secondary hubs. The neighbourhood hubs, N1-16 form a fourth hierarchical tier.

The logical connectivity for this physical system is shown in figure 8. Logically each hub in a tier has connections to two hubs in the next higher tier.

- 30 The tertiary hubs can be connected by using currently installed infrastructure except

## 12

that the connection's distance to a main hub or to a sufficiently high speed connecting hub is very much less than has hitherto been the case in existing telecommunication networks.

- 5 What can now be seen to have been provided is a communication network method and installation which provides for a economical communications carriage to carry both data and voice and voice like signals solely as addressed digital logic packets by providing this at least in a backbone system and distributed mesh networks such that the speed of communication will be sufficient to provide very good voice or other equivalent analogue signal transmissions as well as data.
- 10 This is provided by a transmission speed of at least approximately 2.5 gigabits per second along a main backbone and uniquely capable, and in fact having intermediary connections providing for mesh communication networks both for primary and secondary networks where secondary would be normally at a transmission speed that might be a proportion only of the main backbone
- 15 communication bandwidth.

- Although the invention has been herein shown and described in what is conceived to be the most practical and preferred embodiment, it is recognised that departures can be made within the scope of the invention, which is not to be limited to the details described herein but is to be accorded the full scope of the appended
- 20 claims so as to embrace any and all equivalent devices and apparatus.

**CLAIMS**

1. A data and voice digital communication network installation providing a backbone communication bandwidth solely through addressed digital logic packets of at least 2.5 gigabytes/second between geographically substantially dispersed locations being primary hubs, and having at least one light transmitting fibre through which the transmission is effected with means at respective ends, being the primary hubs, of the fibre to effect an input and output of the communication signals at a rate which is at least the said bandwidth, and further having at least one intermediate means being a secondary hub which is substantially geographically dispersed from said locations of the primary hubs to effect an input and output through addressed digital logic packets into the fibre, and means to then effect transmission of and signals from said secondary hub to a further geographically dispersed location at a rate which is less than the said bandwidth between said primary hubs.
2. A data and voice digital communication network installation including a plurality of packet communication networking hubs, logically configured in a hierarchy of at least two tiers, a transmission backbone network linking said hubs, including at least one light transmitting fibre with means to extract signals from and apply signals to the fibre which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not located at a primary hub, wherein the logical configuration of a given hub is substantially independent of its physical connectivity to the transmission backbone network.
3. A data and voice digital communication network installation as in claim 2, wherein a logical connectivity scheme is constructed and is operated so that it provides a first logical connectivity mesh linking each of a plurality of hubs comprising a first hierarchical tier of hubs, at least one second connectivity mesh linking each of a plurality of hubs comprising a second hierarchical tier of hubs to at least two hubs of said first tier.

- 5       4. A data and voice digital communication network installation as in claim 3, wherein said logical connectivity scheme further includes point to point connectivity between each of a plurality of hubs comprising a third hierarchical tier of hubs and at least one hub from a higher hierarchical tier and point to point connectivity between any hub and selected locations external to the communication network scheme.
- 10       5. A method of operating a data and voice digital communication network including a plurality of packet communication networking hubs, logically configured in a hierarchy of at least two tiers, a transmission backbone network linking said hubs, including at least one light transmitting fibre, extracting signals from and applying signals to the fibre which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not
- 15       located at a primary hub, wherein the logical configuration of a given hub is substantially independent of its physical connectivity to the transmission backbone network.
- 20       6. A data and voice digital communication network as in claim 5, further including the construction and operation of a logical connectivity scheme including a first logical connectivity mesh linking each of a plurality of hubs comprising a first hierarchical tier of hubs, at least one second connectivity mesh linking each of a plurality of hubs comprising a second hierarchical tier of hubs to at least two hubs of said first tier.
- 25       7. A data and voice digital communication network as in claim 6, wherein said logical connectivity scheme further includes point to point connectivity between each of a plurality of hubs comprising a third hierarchical tier of hubs and at least one hub from a higher hierarchical tier and point to point connectivity between any hub and selected locations external to the communication network scheme.
- 30       8. A data and voice digital communication network installed in Australia providing for at least one communication network between Sydney and Melbourne which provides for a bandwidth of at least approximately 2.5 gigabits per second and has at least one intermediate node where the communication method is solely directed toward addressed digital packet

## 15

transmission where both the digital and voice communication over such a backbone connection is by way of such addressed digital logic packets.

- 5 9. A data and voice digital communication network installation covering the geography of Australia providing a backbone communication bandwidth solely through addressed digital logic packets of at least 2.5 gigabytes/second between geographically substantially dispersed locations being primary hubs, and having at least one light transmitting fibre through which the transmission is effected with means at respective ends, being the primary hubs, of the fibre to effect an input and output of the communication signals at a rate which is at least the said bandwidth, and  
10 further having at least one intermediate means being a secondary hub which is substantially geographically dispersed from said locations of the primary hubs to effect an input and output through addressed digital logic packets into the fibre, and means to then effect transmission of and signals from said  
15 secondary hub to a further geographically dispersed location at a rate which is less than the said bandwidth between said primary hubs.
- 20 10. A data and voice digital communication network substantially as described with respect to any one of the embodiments in the specification with reference to and as illustrated by the accompanying illustrations with respect to that embodiment.

**(19) World Intellectual Property  
Organization  
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(43) International Publication Date**  
**20 January 2005 (20.01.2005)**

**PCT**

**(10) International Publication Number**  
**WO 2005/006657 A1**

**(51) International Patent Classification<sup>7</sup>: H04L 12/28,**  
12/56

**(21) International Application Number:**  
PCT/AU2004/000941

**(22) International Filing Date:** 14 July 2004 (14.07.2004)

**(25) Filing Language:** English

**(26) Publication Language:** English

(30) Priority Data: 2003903602 14 July 2003 (14.07.2003) AU

**(71) Applicant and**

(72) Inventor: MUTABAZI, Steven, Luzima [AU/AU]; 57 Burnett Street, Mitcham, VIC 3132 (AU).

(74) Agent: COLLISON & CO; GPO Box 2556, Adelaide, S.A. 5001 (AU).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PI, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


**(84) Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

***For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.***


**(54) Title: NETWORKING CORRIDORS FOR PACKET DATA AND VOICE COMMUNICATIONS**

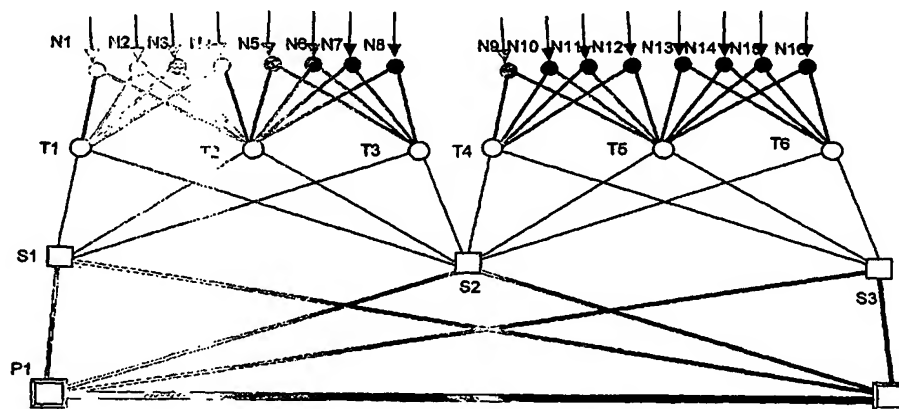

**(57) Abstract:** A data and voice digital communication network installation and networking method, including a plurality of packet communication networking hubs, logically configured in a hierarchy of at least two tiers, a transmission backbone network linking said hubs, including at least one light transmitting fibre with means to extract signals from and apply signals to the fibre which are at least a proportion of end to end signals being carried by the fibre, said signals being extracted to and received from the packet communications networking hubs, at a plurality of selected locations, including at least one which is not located at a primary hub, wherein the logical configuration of a given hub is substantially independent of its physical connectivity to the transmission backbone network.

1ST AVAILABLE COPY



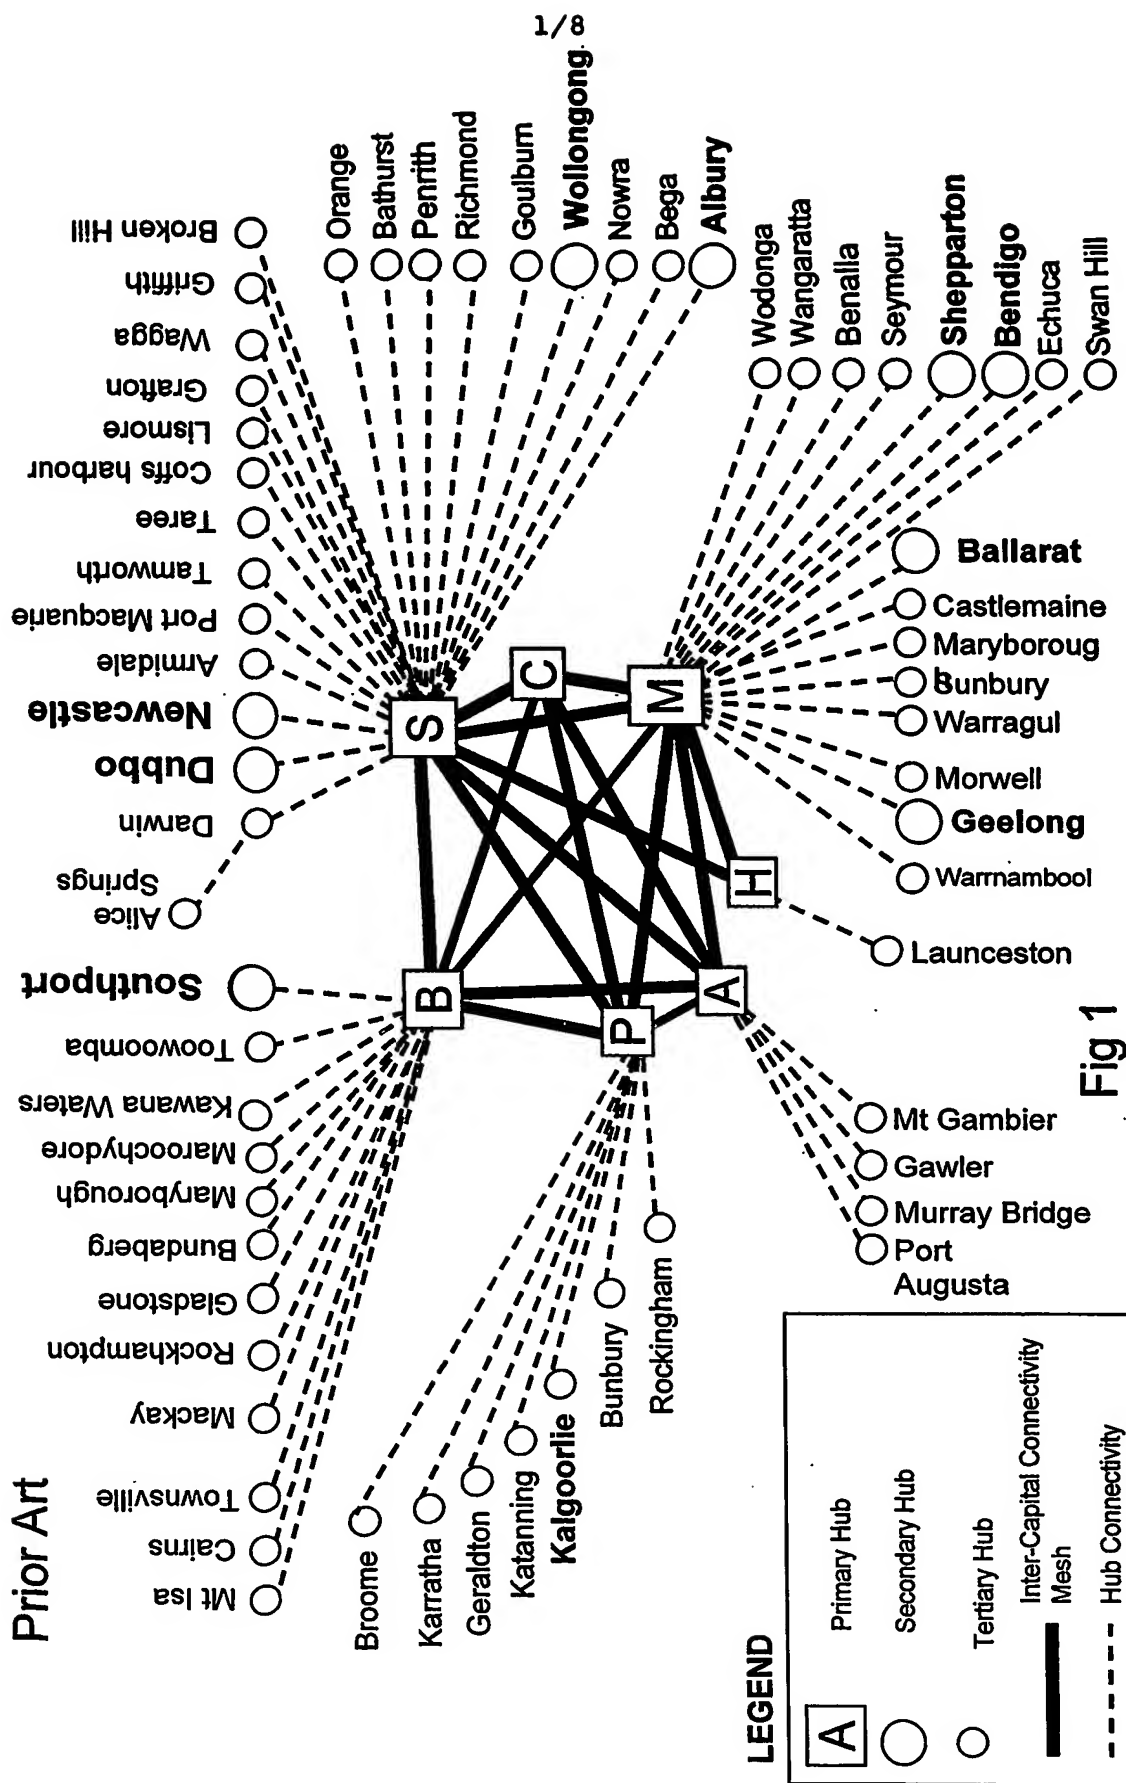

2/8


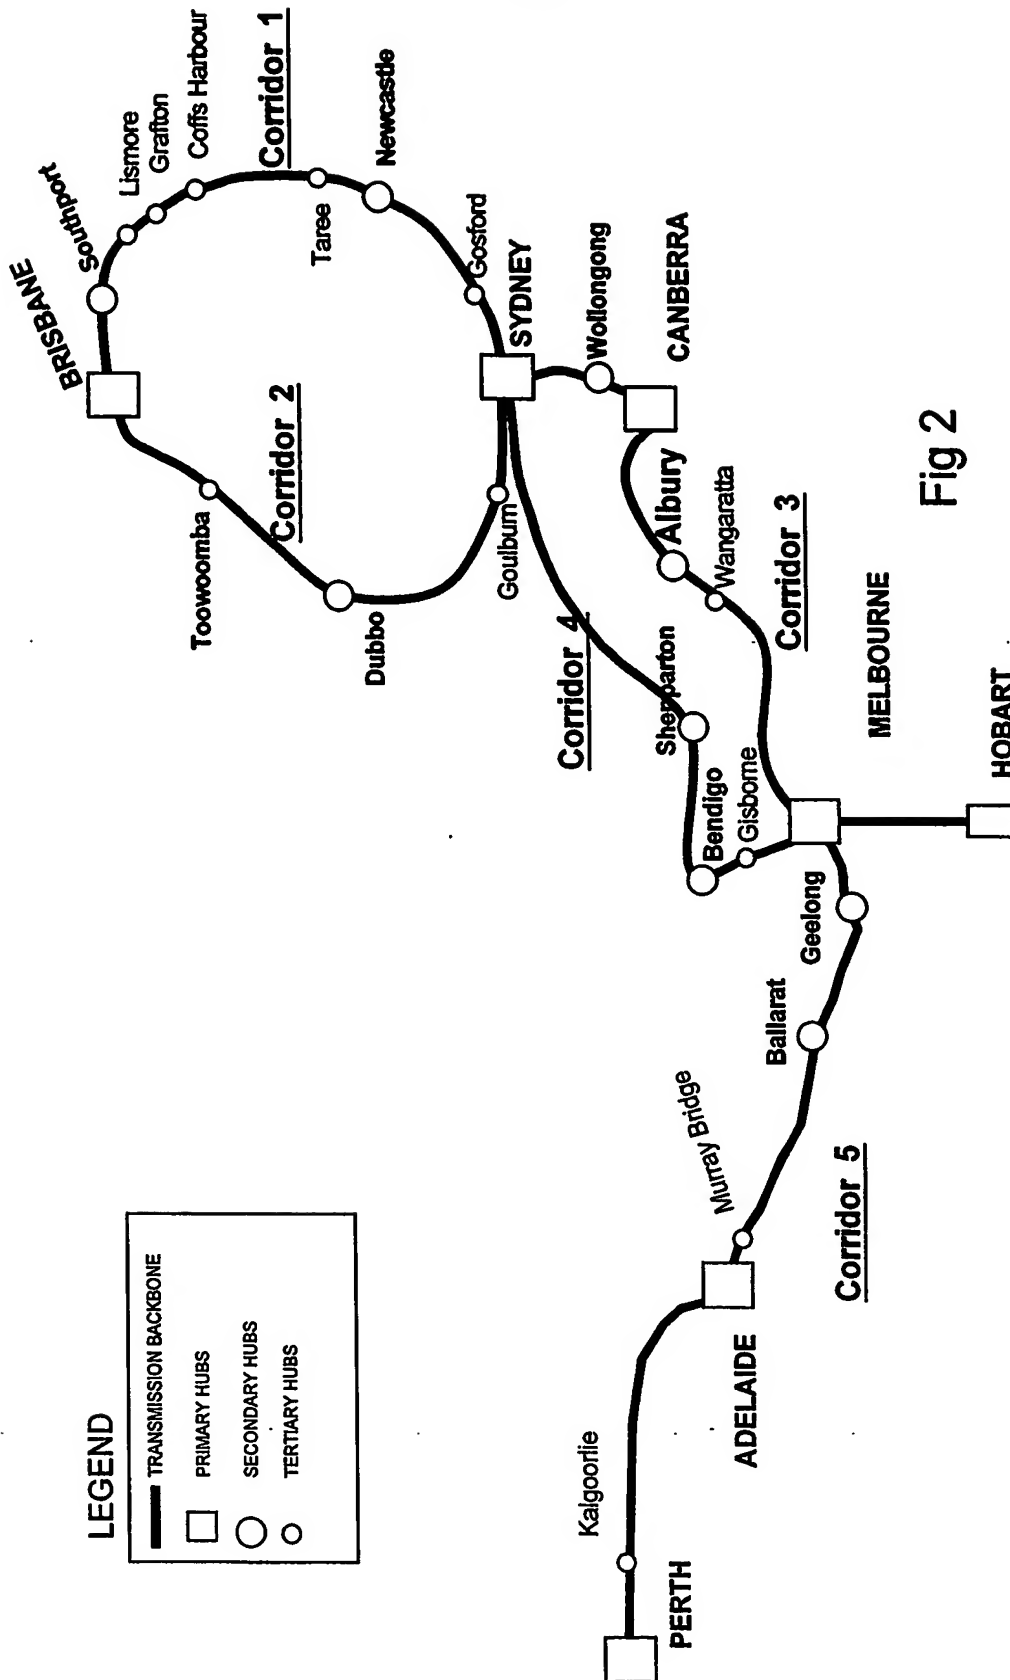


Fig 2

3/8

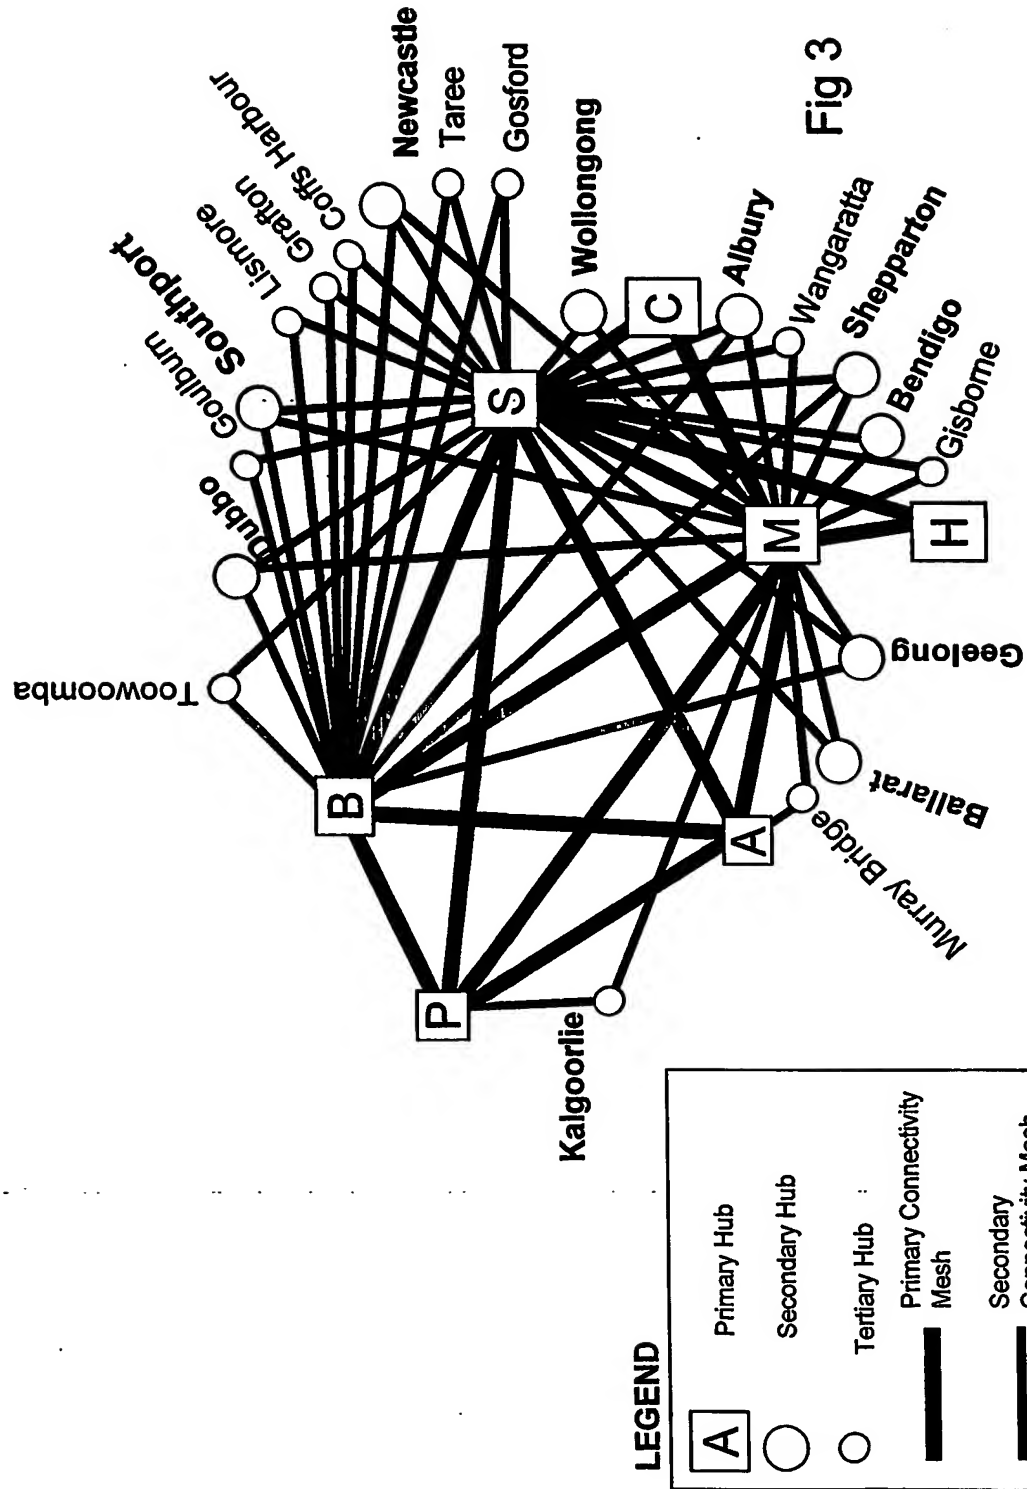

SECRET AVAILABLE COPY

4/8



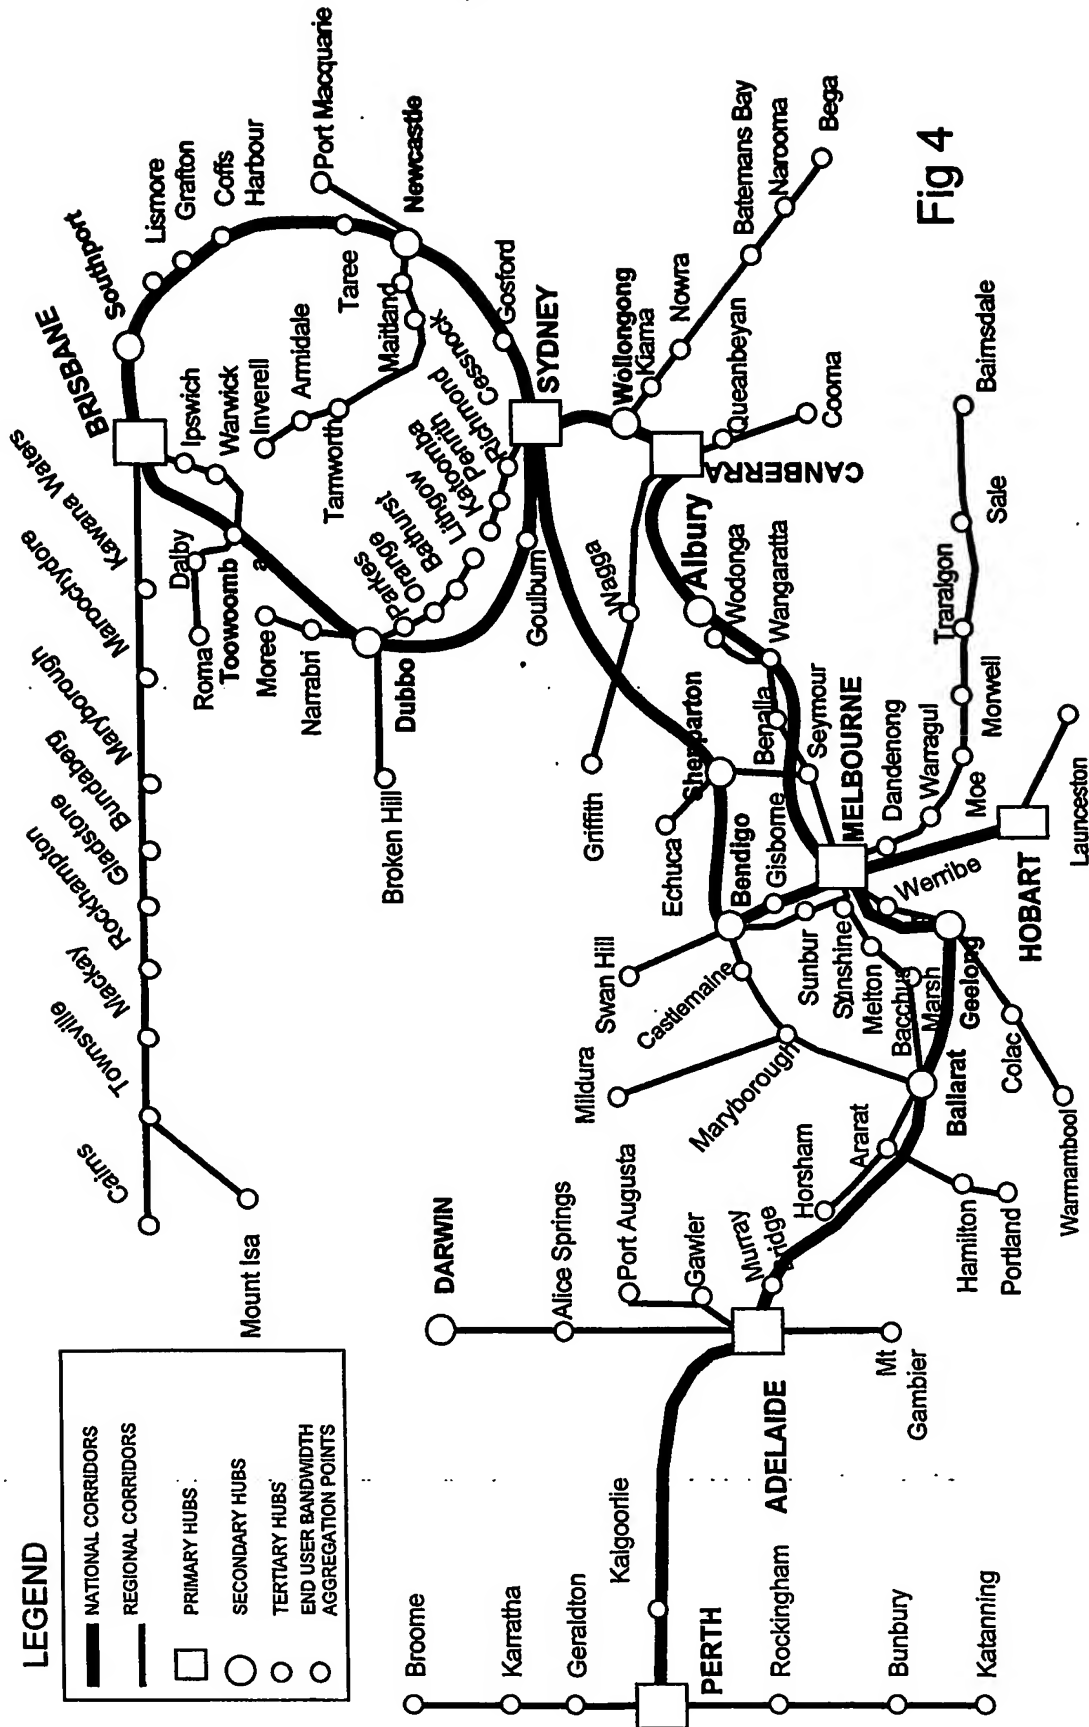


Fig 4

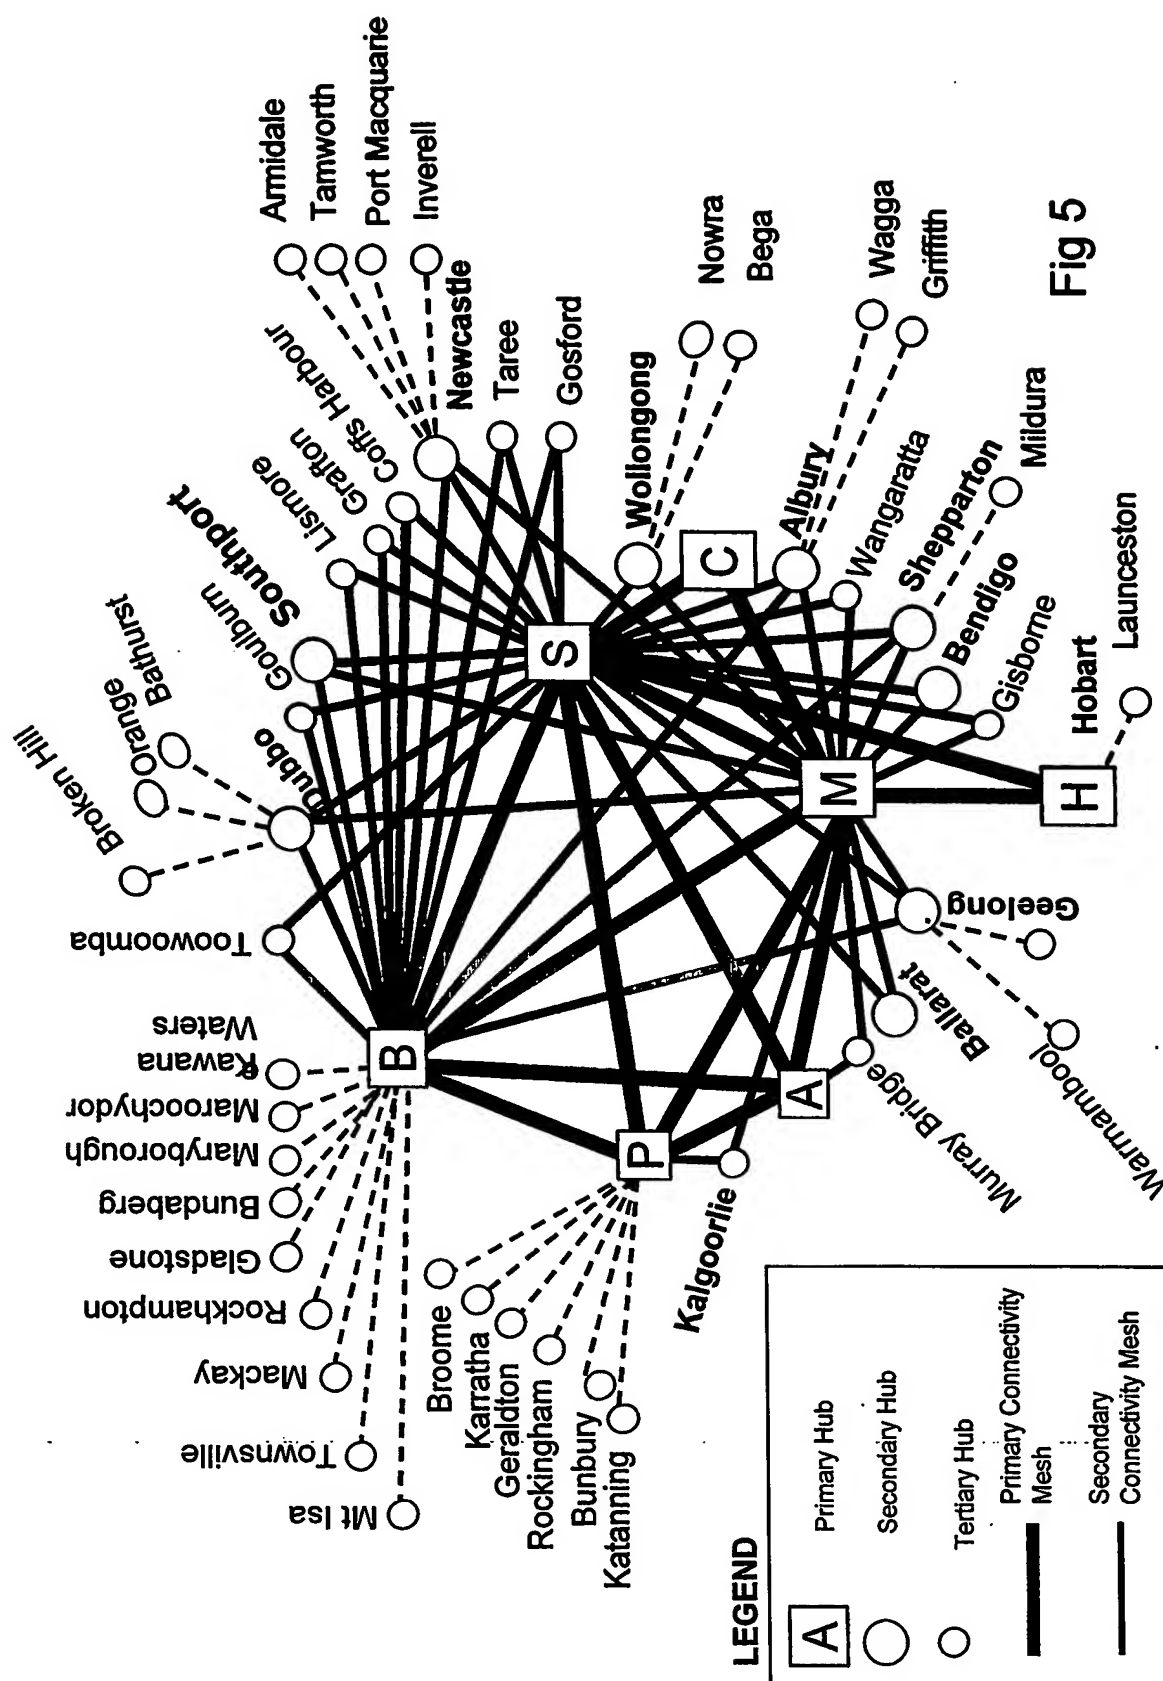

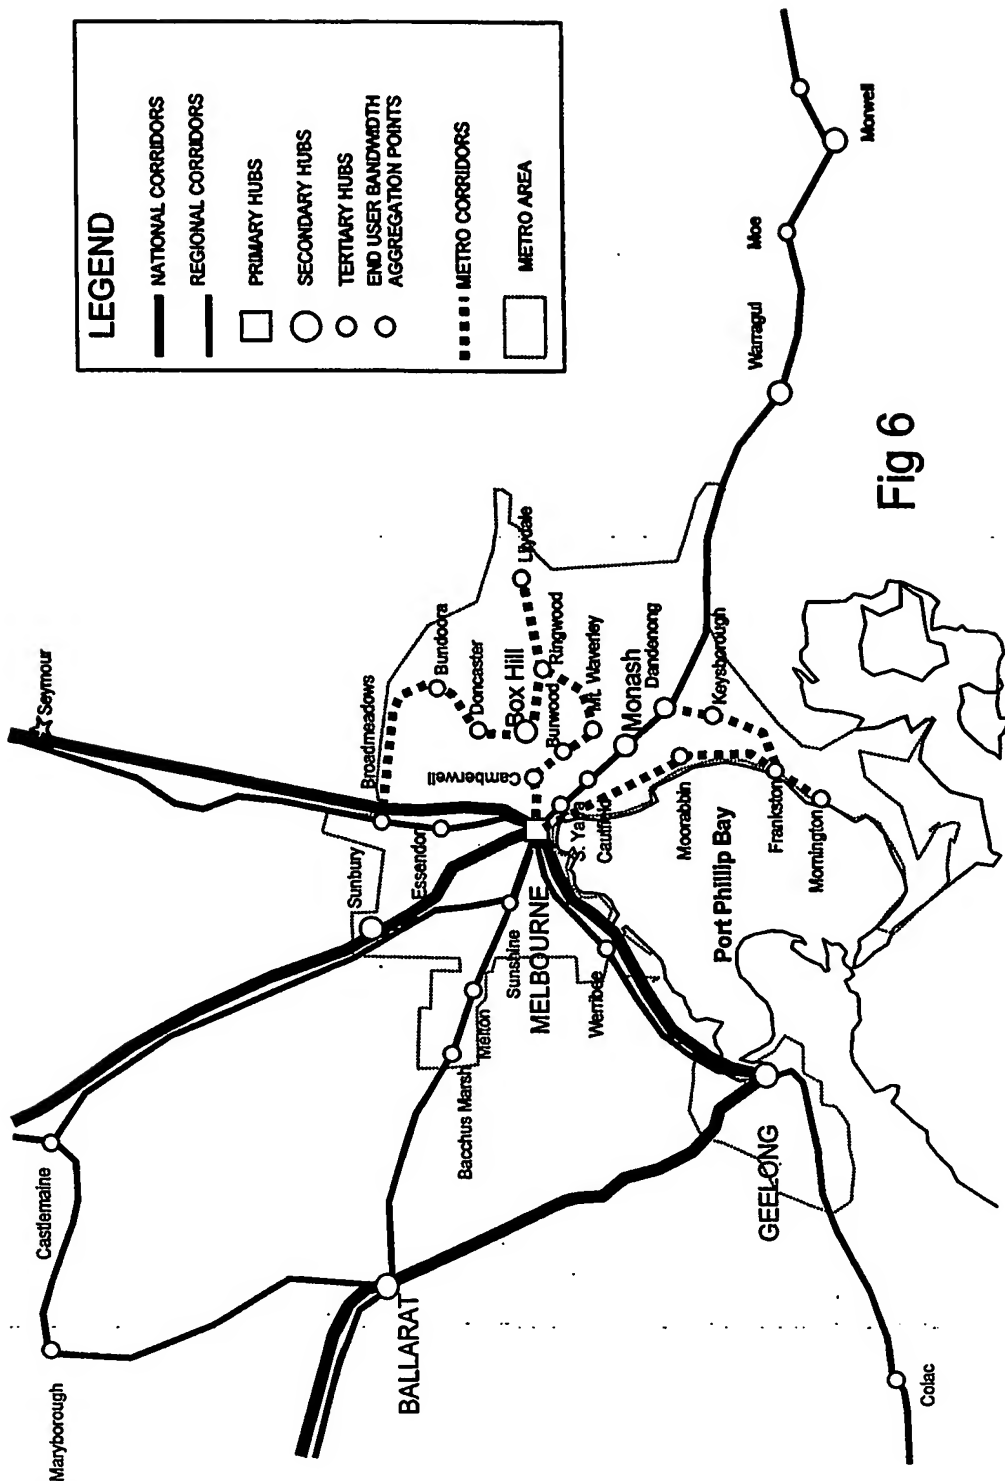

7/8

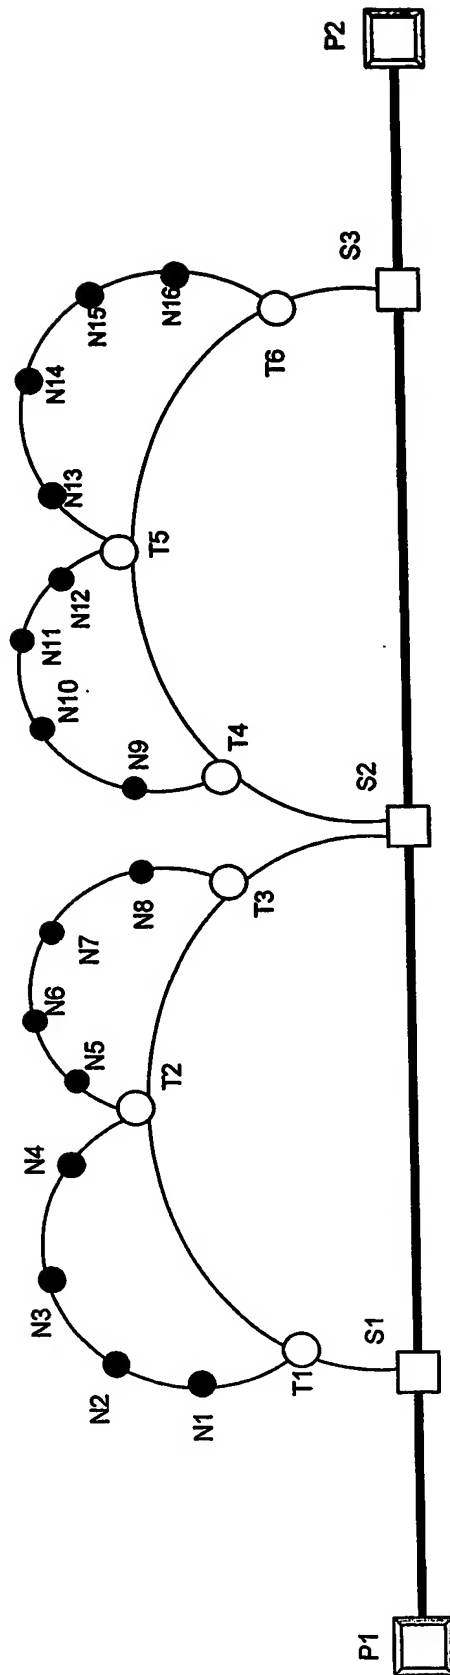


Figure 7

8/8

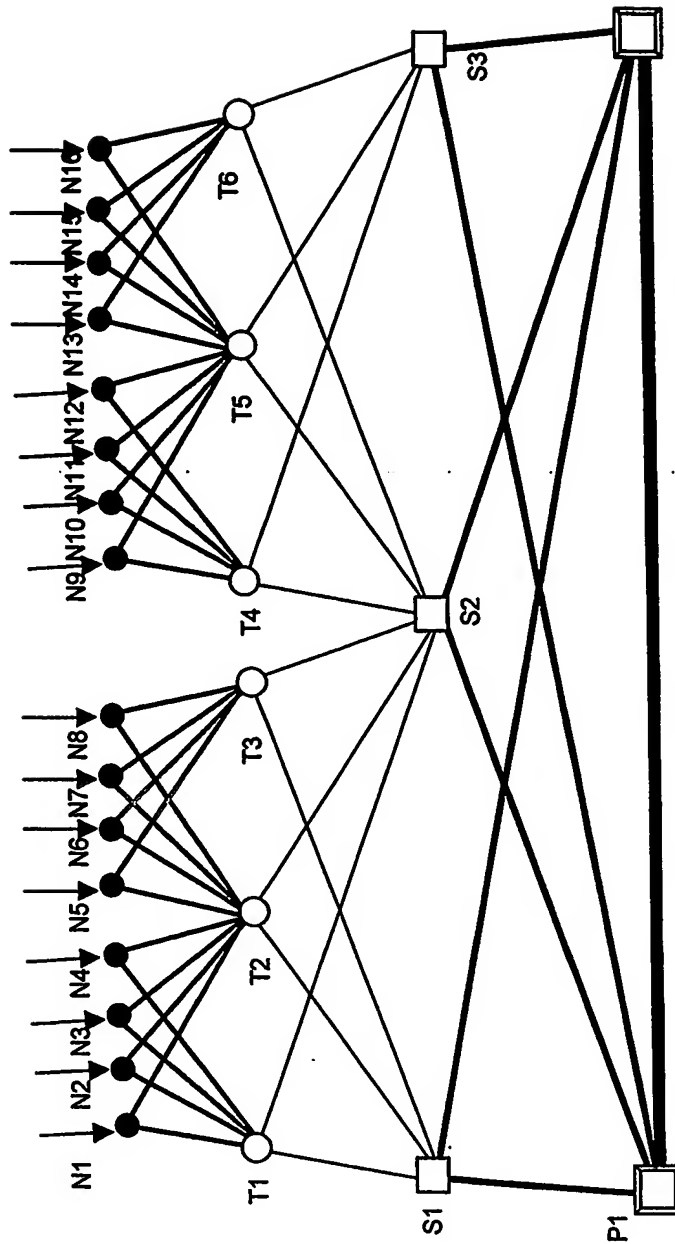


Figure 8